


- NOTES:
1. TO BE USED WITH ICC ESR 2229, 2488 OR 1599.
 2. ALLOWABLE PANELS SPAN ARE AS PER #1. LIGHT STRIP DOES NOT REDUCE PANEL SPANS.
 3. LIGHT STRIP EXTRUSION IS REPRESENTED GENERICALLY IN THIS DETAIL. LIGHT STRIP MUST FULLY ENGAGE SANDWICH PANEL LOCKS AND FIT SNUGLY, SIMILAR TO PANEL TO PANEL CONNECTION.
 4. COMPLIANCE WITH ELECTRICAL CODE IS OUTSIDE SCOPE OF THIS DETAIL AND MUST BE APPROVED SEPERATELY.
 5. MAXIMUM OF FOUR LIGHTS PER LIGHT STRIP IS ALLOWED. ONE OF THE LIGHTS MAY BE REPLACED WITH A FAN (30 LBS MAXIMUM WEIGHT). ATTACHMENT OF THE FAN MUST COMPLY WITH MANUFACTURERS INSTRUCTIONS.

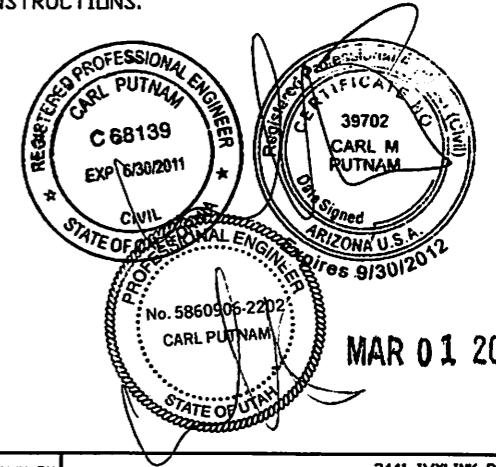

LOCKING EXTRUSIONS DESIGNED TO MATE W/ PANELS DESCRIBED IN NOTE #1

LIGHT STRIP EXTRUSION FOR SANDWICH PANELS

| | | |
|------------|----------|--|
| DATE | DRAWN BY | 3441 IVYLINK PLACE LYNCHBURG, VA 24503 (434) 384-2514 CARLPUTNAM@DELPHIANET |
| 10/27/2010 | CMP | |
| | CLIENT | TheLightStripLLC |
| | FILE | PanelwCoverFoamCore.dwg |
| | DESC | The Light Strip |