





4" MINIATURE NON-IC REMODEL HOUSING

LAMP WATTAGE:

(1) Maximum 50W R/PAR20/A19

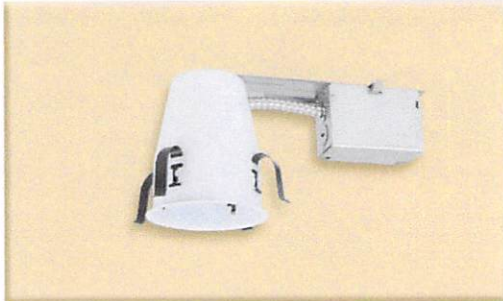

DESIGNED FOR 2" X 6" JOIST CONSTRUCTION

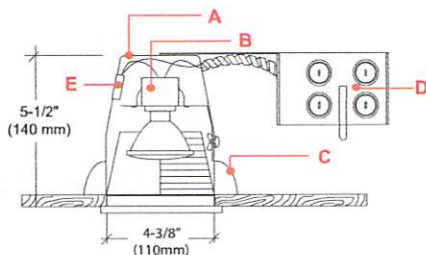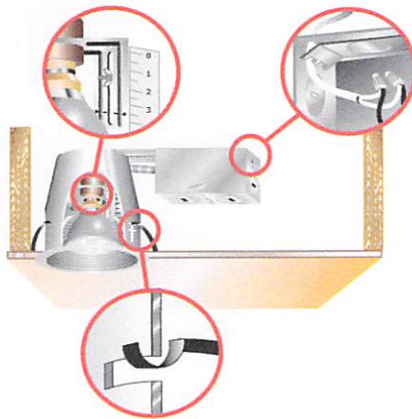

DESCRIPTION:

Small aperture thermally protected, specification grade recessed housing. For remodel application non-insulated ceilings or where insulation can be kept 3" from housing. For fast and easy installation in existing plaster or mechanical ceilings from 1/2" to 1-3/8" thick. Four remodel clips are easily retractable for fixture removal if necessary. Junction box is provided with eight 1/2" KOs and four Romex knockouts with strain relief. Accommodates up to 50W PAR20, R20, and A19 lamps.

SPECIFICATION:

A. HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Accommodate lamps up to 50W depending on trim used.

B. SOCKET - Medium base screw shell porcelain socket preinstalled on adjustable mounting bracket is designed to allow usage of different lamp types, as well as proper and consistent lamp positioning.

C. INSTALLATION - Four Preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thicknesses from 1/2" to 1-3/8".

D. JUNCTION BOX - UL and ETL for feed through wiring with eight 1/2" KOs and four Romex knockouts with strain relief.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, overlamping and misuse of insulation material.

UL and C-UL listed
ETL and C-ETL listed
 For Damp location
 For Feed-through wiring



4"		
B4R • B402CL 50W PAR20 NSP LAMP		
5'	248	0.8'
8'	97	1.3'
10'	62	1.6'
12'	43	1.9'
Distance to Plane	Initial Nadir Footcandles	Beam Spread

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES:

- Thermally Protected Non-IC Remodel housing.
- Dependable, favorable design and effortless installation.
- Unit slips through 4-1/4" ceiling opening.
- Four preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thicknesses from 1/2" to 1-3/8".
- Can be installed from below the ceiling.
- 5 1/2" height allows use in 2"x 6" joist construction.
- Preinstalled socket cap provides electrical contact protection against dust, paint and over spray.
- Adjustable Socket bracket.

OPTION:

- AIR-SHUT-**
 - Gasket to prevent air flow from heated or air conditioned spaces.
 - Meets all national air flow requirements.

ITEM SELECTOR: (Please check the boxes below for the option desired)

TYPE	OPTION(S)	
B4R	<input type="checkbox"/> AIR SHUT	<input type="checkbox"/> WITH QUICK CONNECTS
	<input type="checkbox"/> AT	<input type="checkbox"/> W



4"